


SPECIFICATIONS

MFG.	STEGO (KTS 01141.9-00)
SWITCH DIFFERENCE (TEMPERATURE)	8K
SENSOR ELEMENT	THERMOSTATIC BIMETAL
CONTACT RESISTANCE	< 10m OHMS
SERVICE LIFE	> 100,000 CYCLES
MAX. SWITCHING CAPACITY	AC 250V 10A (RESISTIVE LOAD) AC 120V 15A (RESISTIVE LOAD) AC 250V/120V 2A (INDUCTIVE LOAD AT COS PHI = 0.6) DC 30W
EMC	ACC. TO EN 55014-1-2, EN 61000-3-2, EN 61000-3-3
CONNECTION	2-POLE TERMINAL FOR 2.5 MM SQ.
MOUNTING	STEGOFIX MOUNTING AIDE
WEIGHT (CA.)	40G
FITTING POSITION	VARIABLE
STORAGE TEMP.	-45°C (-49°F) TO 70°C (158°F)
PROT. TYPE/ PROT. CLASS	IP 20/
SETTING RANGE BREAKER	32 TO 140°F
APPROVALS	CE, UL
UL FILE NO.	E164102

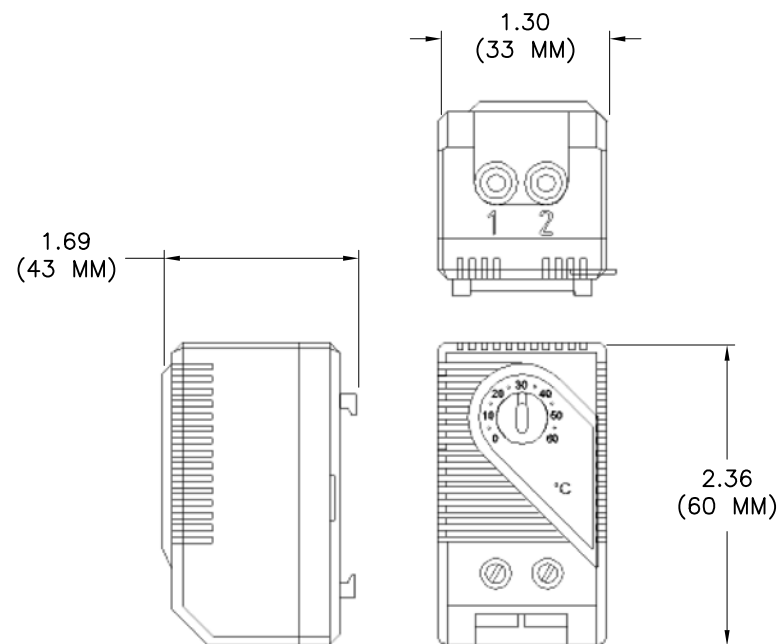

NOTES:

1. WHEN ORDERING USE PART NO. ATFPAT (THERMOSTAT KIT)